

Specifications

Point Array Loudspeakers_T Series

T 9

Information

The T9 stems from T7, which is 2-way passive type, and its performance makes deep and articulate sound in mid high as 3-way Bi-amp. The T9 is a dedicated mid high cabinet to be used with the T28B. The perfect tonal matching between sub and mid high ensures punchy yet crystal clear results for anything, from dance floor to live rock and roll gigs. It's ideal configuration of two mid highs and three subs creating the perfect stack height, lifting the hf units way above head height.


The long life span and versatility of the T-series make it an ideal addition to any rental company stock. It's robust design manufactured from the highest quality birch ply ensures the T9 will give a positive return on your investment whilst retaining its value.



Key Features

- High SPL 3-Way Bi-amp Loudspeaker System
- Enclosed horn-loading system

Drawing

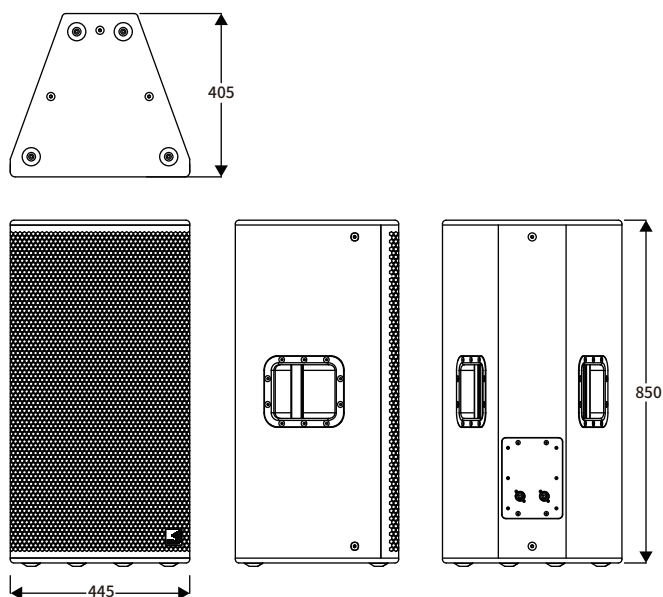

Specifications

Point Array Loudspeakers_T Series

T 9

Technical Specification	
Type	Full range
Impedance	Low 4 ohm, Hi-Mid 16 ohm
Power (Program / Peak)	1250 Watts / 2500 Watts
Sensitivity 2.83V / 1m	106 dB
Max SPL	134 dB (cont. max SPL / 1m), 140 dB peak
Frequency response -3dB	87 Hz - 22 kHz
Dispersion	60° x 40°
Product Features	
Components	Coaxial Hi-Mid Compression
Crossover	Bi-amp
Connectors	2 x 4 pole Speakon Connectors
Dimensions (W x H x D)	445 mm x 850 mm x 405 mm
Weight (Kg)	43
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	3 x M6 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
18 mm Birch Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with stainless steel Chris-system logo.	