Specifications

Point Array Loudspeakers_T Series

T 7

Information

The T7 is a dedicated mid high cabinet to be used with the T28B. The perfect tonal matching between sub and mid high ensures punchy yet crystal clear results for anything, from dance floor to live rock and roll gigs. It's ideal configuration of two mid highs and three subs creating the perfect stack height, lifting the hf units way above head height.


The long life span and versatility of the T-series make it an ideal addition to any rental company stock. It's robust design manufactured from the highest quality birch ply ensures the T7 will give a positive return on your investment whilst retaining its value.



Key Features

- Dedicated high SPL 2-way Loudspeaker
- Suitable for wide variety of applications

Drawing

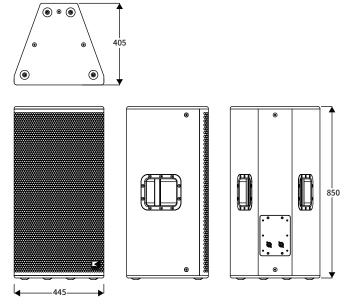







Specifications Point Array Loudspeakers_T Series

Technical Specification	
Туре	Full range
Impedance	4 Ohm
Power (Program / Peak)	1250 Watts / 2500 Watts
Sensitivity 2.83V / 1m	106 dB
Max SPL	134 dB (cont. max SPL / 1m), 140 dB peak
Frequency response -3dB	87 Hz - 20 kHz
Dispersion	60° x 40°
Product Features	
Components	2 x 12" Low Frequency Drivers / 1 x 1.4"horn loaded Compression E
Crossover	Passive
Connectors	2 x 4 pole Speakon Connectors
Dimensions (W x H x D)	445 mm x 850 mm x 405 mm
Weight (Kg)	43
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	3 x M6 mounting points for installation brackets, cradle,
	tilt and turn hardware and second fix
Additional Descriptive Data	18 mm Birch Ply construction, with durable scratch resistant black to
	kick-proof steel grill finished with stainless steel Chris-system logo.

Full range	
4 Ohm	
1250 Watts / 2500 Watts	
106 dB	
134 dB (cont. max SPL / 1m), 140 dB peak	
87 Hz - 20 kHz	
60° x 40°	
2 x 12" Low Frequency Drivers / 1 x 1.4"horn loaded Compression Driver	
Passive	
2 x 4 pole Speakon Connectors	
445 mm x 850 mm x 405 mm	
43	
Black	
Available in white or Ral colours on request.	
3 x M6 mounting points for installation brackets, cradle,	
tilt and turn hardware and second fix	
18 mm Birch Ply construction, with durable scratch resistant black textured paint finish,	