

Specifications

Mid-High Loudspeakers_Q Series

Q 26

Information

Q26은 passive 2way 스피커로 크기에 비해 높은 음압, 자연스러운 소리의 재생, 눈앞에 떨어지는 정확한 소리의 포커싱을 자랑합니다. 중, 소규모 강당, 발코니를 위한 딜레이 스피커, 사각 지대를 위한 서브 스피커, 객석 앞부분을 위한 센터 필 등 여러가지 상황에 따른 적합한 사용이 가능하며 별도의 프로세서 없이도 정확하고도 높은 음질의 재생이 가능합니다. 특히 테마파크 및 소규모 행사에 적합하며 심플하면서도 세련된 디자인의 스피커입니다.


야외 사용을 위한 방수 및 특수 도장은 옵션으로 선택이 가능합니다.



Key Features

- Increased SPL over Q6
- Enhanced vertical dispersion control
- Shared voicing with Q6 allows perfect mix and match options
- Use for ; Installations requiring tight vertical dispersion control Conferencing and delay applications

Drawing

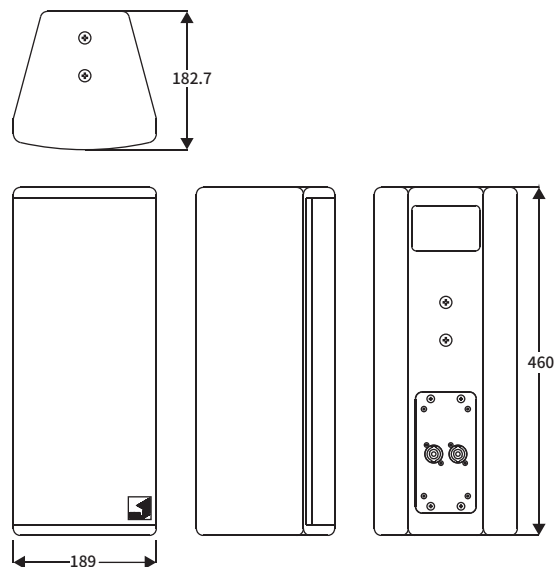


Specifications

Mid-High Loudspeakers_Q Series

Q 26

Technical Specification	
Type	Full-Range, Reflex Tuning
Impedance	8 Ohm, Minimum 6.7 ohm @ 286 Hz
Power (Program / Peak)	500 Watts / 1000 Watts
Sensitivity 2.83V / 1m	90.1 dB
Max SPL	114 dB (cont. max SPL / 1m), 120 dB peak
Frequency response -3dB	85 Hz - 18.5 kHz
Dispersion	100° x 40°
Product Features	
Components	2 x 6" Low Frequency Drivers / 1 x horn loaded tweeter
Crossover	Passive
Connectors	2 x 4 pole Speakon Connectors, 2 x Binding Posts
Dimensions (W x H x D)	189 mm x 460 mm x 182 mm
Weight (Kg)	7
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	3 x M6 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
15 mm MDF construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with stainless steel Chris-system logo.	

Frequency Response

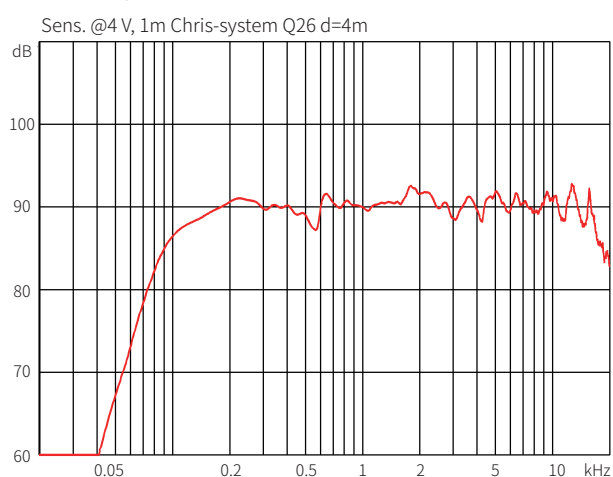

Impedance Response

