

# Specifications

Full Range Loudspeakers\_K Series

---

**K 6**


---

## Information


The K6 is an all-purpose full-range loudspeaker designed for near-field contracting applications. Rated at 240watts(Program), fitted with one 6.5"woofer and one 1"exit compression driver coupled to a wide dispersion HF horn.



## Key Features

- Ultra-compact two-way system
- Multi-angled plywood enclosure
- Constant dispersion 140° horn
- Flexible mounting options

## Drawing

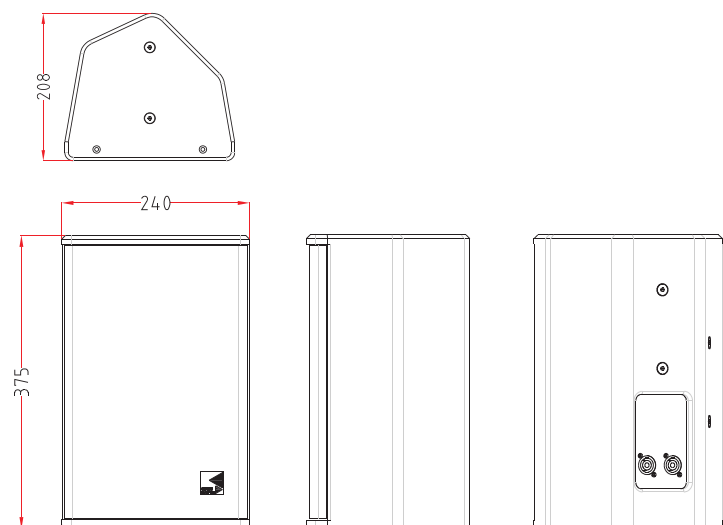


# Specifications

Full Range Loudspeakers\_K Series

K 6

Technical Specifications	
Type	Two way Loudspeaker System
Impedance	8 Ohm
Power (Program / Peak)	240 Watts / 480 Watts
Sensitivity 2.83V / 1m	90 dB 1watt/1 metre
Max SPL	110 dB (cont. max SPL / 1m), 116 dB peak
Frequency response -3dB	80 Hz - 18 kHz
Dispersion	140°
Product Features	
Components	1 x 6.5" Low Frequency Driver / 1 x 1" horn loaded compression driver
Crossover	Passive
Connectors	2 x 4 pole Speakon Connectors NL4
Dimensions (W x H x D)	240 mm x 375 mm x 208 mm
Weight (Kg)	6
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	6 x M8 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
12 mm Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with aluminium Chris-system logo.	

## Frequency Response

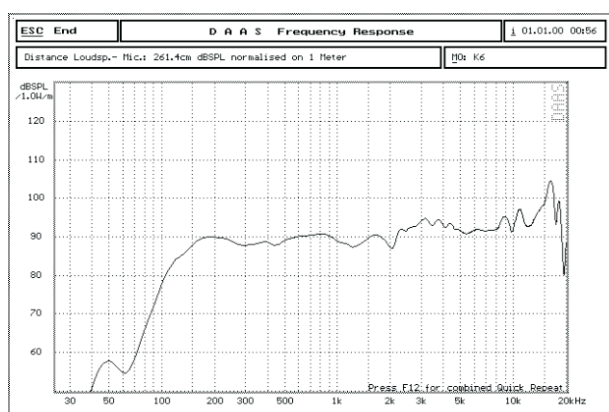

## Impedance Response

