

Specifications

Full Range Loudspeakers_K Series

K 8

Information


The K8 is an all-purpose full-range loudspeaker designed for near-field contracting applications. Rated at 300watts(Program), fitted with one 8"woofer and one 1"exit compression driver coupled to a wide dispersion HF horn.



Key Features

- Ultra-compact two-way system
- Multi-angled plywood enclosure
- Rotatable 90°x50° horn
- Flexible mounting options
- Top hat fitting for tripod

Drawing

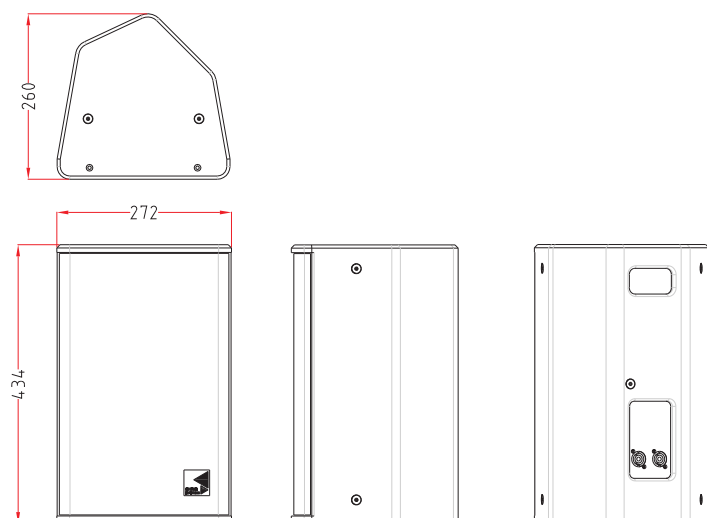


Specifications

Full Range Loudspeakers_K Series

K 8

Technical Specifications	
Type	Two way Loudspeaker System
Impedance	8 Ohm
Power (Program / Peak)	300 Watts / 600 Watts
Sensitivity 2.83V / 1m	93 dB 1watt/1 metre
Max SPL	115 dB (cont. max SPL / 1m), 121 dB peak
Frequency response -3dB	60 Hz - 18 kHz
Dispersion	90° x 50°
Product Features	
Components	1 x 8" Low Frequency Driver / 1 x 1" horn loaded compression driver
Crossover	Passive
Connectors	2 x Speakon Connectors NL4
Dimensions (W x H x D)	272 mm x 434 mm x 260 mm
Weight (Kg)	9
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	9 x M8 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
	12 mm Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with aluminium Chris-system logo.

Frequency Response

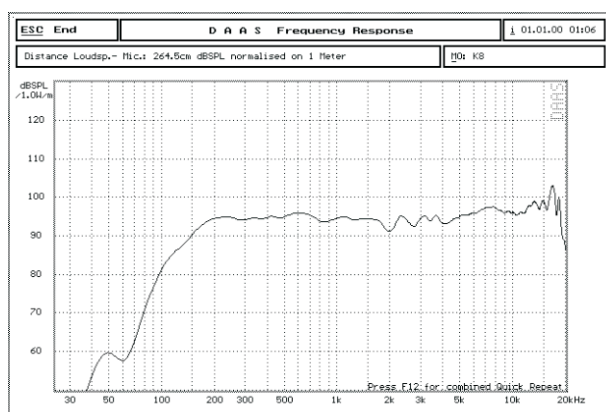

Impedance Response

