

# Specifications

Full Range Loudspeakers\_K Series

## K 10

### Information


The K10 is an all-purpose full-range loudspeaker designed for near-field contracting applications. Rated at 500watts(Program), fitted with one 10" woofer and one 1" exit compression driver coupled to a wide dispersion HF horn.



### Key Features

- Ultra-compact two-way system
- Multi-angled plywood enclosure
- Rotatable 90°x50° horn
- High power output
- Flexible mounting options
- Top hat fitting for tripod

### Drawing

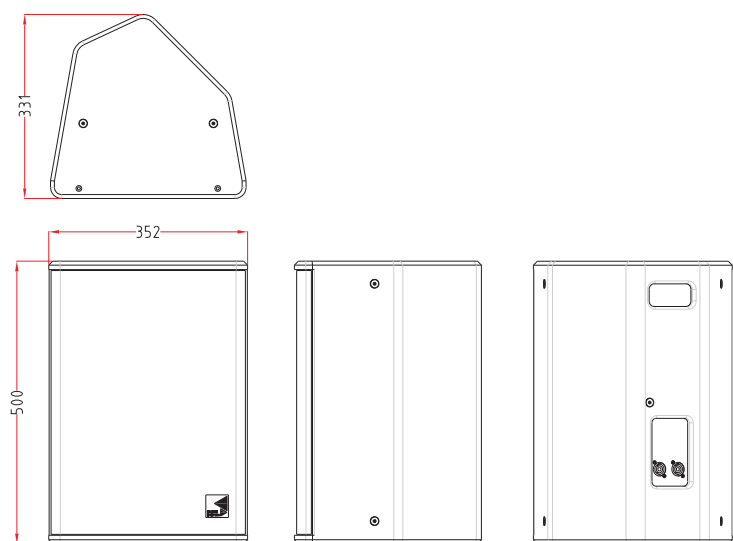


# Specifications

Full Range Loudspeakers\_K Series

## K 10

Technical Specifications	
Type	Two way Loudspeaker System
Impedance	8 Ohm
Power (Program / Peak)	500 Watts / 1000 Watts
Sensitivity 2.83V / 1m	95 dB 1watt/1 metre
Max SPL	119 dB (cont. max SPL / 1m), 125 dB peak
Frequency response -3dB	55 Hz - 18 kHz
Dispersion	90° x 50°
Product Features	
Components	1 x 10" Low Frequency Driver / 1 x 1" horn loaded compression driver
Crossover	Passive
Connectors	2 x Speakon Connectors NL4
Dimensions (W x H x D)	352 mm x 500 mm x 331 mm
Weight (Kg)	15
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	6 x M8 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
12 mm Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with aluminium Chris-system logo.	

## Frequency Response

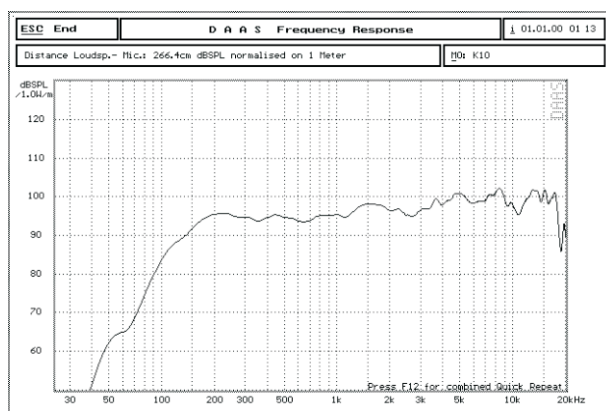

## Impedance Response

