

# Specifications

Full Range Loudspeaker\_K Series

## K 15

### Information


The K15 is the ideal general-purpose loudspeaker with a wide frequency response, suitable for all kinds of mind-field theatre and live venue applications that require professional sound quality.



### Key Features

- Wide-bandwidth system
- Multi-angle plywood enclosure
- Rotatable 90° x 40° horn
- Flexible mounting options
- Top hat fitting for tripod

### Drawing

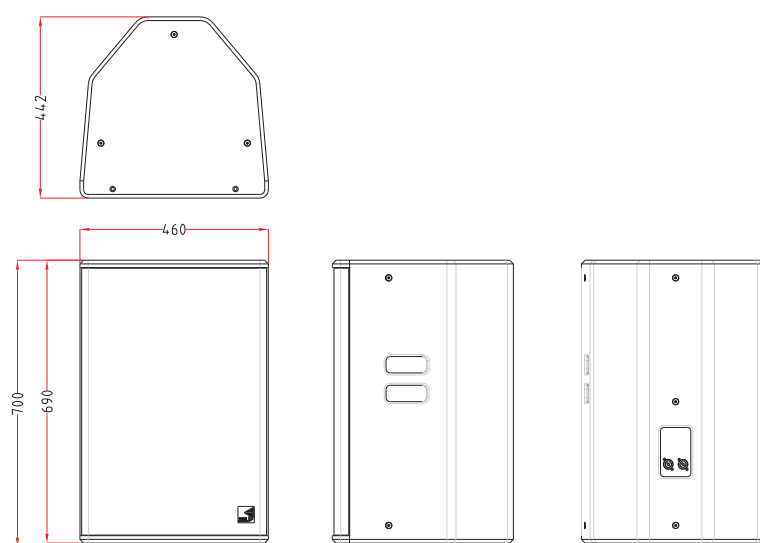


# Specifications

Full Range Loudspeaker\_K Series

## K 15

Technical Specification	
Type	Two way Loudspeaker System
Impedance	8 Ohm
Power (Program / Peak)	800 Watts / 1600 Watts
Sensitivity 2.83V / 1m	98 dB 1watt/1 metre
Max SPL	124 dB (cont. max SPL / 1m), 130 dB peak
Frequency response -3dB	40 Hz - 18 kHz
Dispersion	90° x 40°
Product Features	
Components	1 x 15" Low Frequency Driver/1 x 1.4" horn loaded compression driver
Crossover	Passive
Connectors	2 x Speakon Connectors NL4
Dimensions (W x H x D)	460 mm x 690 mm x 442 mm
Weight (Kg)	31
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	13 x M8 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
18 mm Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with aluminium Chris-system logo.	

## Frequency Response

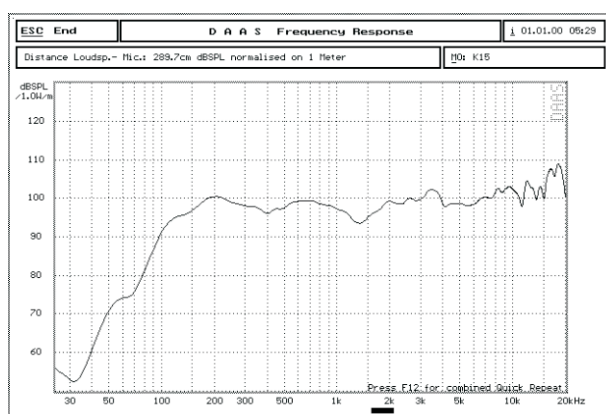

## Impedance Response

