

Specifications

Full Range Loudspeaker_K Series

K 15M

Information


The K15M is a high precision and high power stage monitor. It offers a "studio monitoring" type of response, exceptional dynamic capability, very low distortion, and has mechanical system for angle adjustment when floor mounted.



Key Features

- Wide-bandwidth system
- Multi-angle plywood enclosure
- Constant directivity 90° horn

Drawing

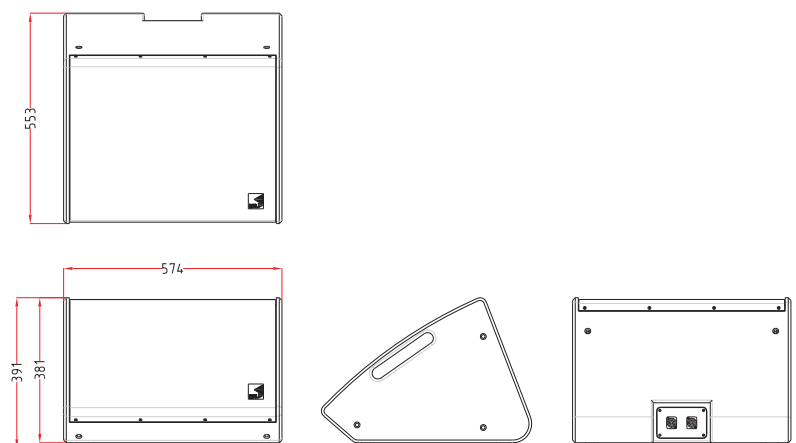


Specifications

Full Range Loudspeaker_K Series

K 15M

Technical Specifications	
Type	Two way Loudspeaker System
Impedance	8 Ohm
Power (Program / Peak)	800 Watts / 1600 Watts
Sensitivity 2.83V / 1m	98 dB 1watt/1 metre
Max SPL	124 dB (cont. max SPL / 1m), 130 dB peak
Frequency response -3dB	55 Hz - 18 kHz
Dispersion	90°
Product Features	
Components	1 x 15" Low Frequency Driver/1 x 1.4" horn loaded compression driver
Crossover	Passive
Connectors	2 x Speakon Connectors NL4
Dimensions (W x H x D)	574 mm x 381mm x 553 mm
Weight (Kg)	20
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	12 x M8 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
15 mm Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with aluminium Chris-system logo.	

Frequency Response

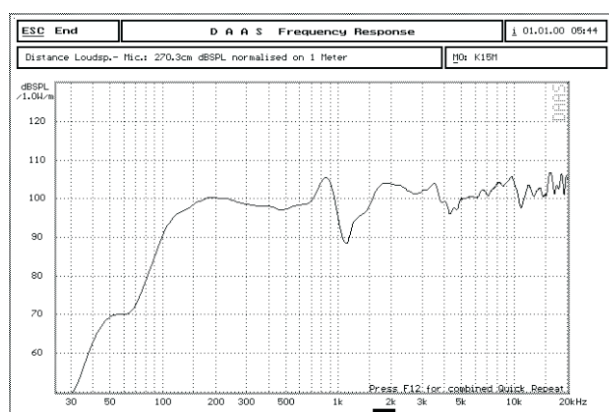

Impedance Response

