

# Specifications

Subwoofer\_K Series

## K 15B

### Information


The K15B is a single 15" low frequency enclosure designed for sub-bass reinforcement to K Compact series in a wide variety of fixed installation.



### Key Features

- High quality plywood
- Compact vented sub-bass
- Direct radiating 15" (460mm) sub-woofer)
- High temperature 4" (100mm) voice coil
- Top hat fitting for pole mounting to K8/K10

### Drawing

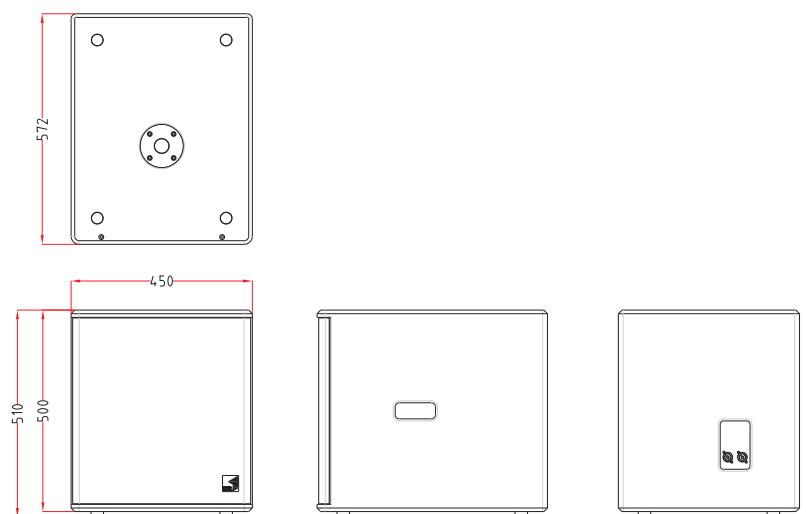


# Specifications

Subwoofer\_K Series

## K 15B

Technical Specifications	
Type	Subwoofer System
Impedance	8 Ohm
Power (Program / Peak)	1200 Watts / 2400 Watts
Sensitivity 2.83V / 1m	99 dB 1watt/1 metre
Max SPL	126 dB (cont. max SPL / 1m), 132 dB peak
Frequency response -3dB	40 Hz - 300 Hz
Dispersion	
Product Features	
Components	1 x 15" Low Frequency Driver
Crossover	Passive
Connectors	2 x Speakon Connectors NL4
Dimensions (W x H x D)	450 mm x 500mm x 572 mm
Weight (Kg)	31
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	12 x M8 mounting points for installation brackets, cradle, tilt and turn hardware and second fix
Additional Descriptive Data	
	18 mm Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with aluminium Chris-system logo.

## Frequency Response

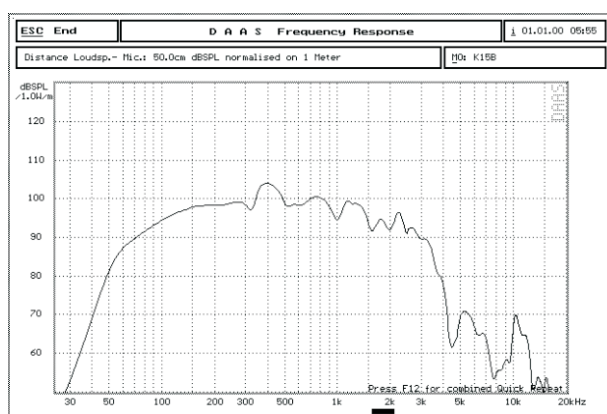

## Impedance Response

