

Specifications

Full Range Loudspeakers_Q Series

Q 12

Information


Q12는 교회 및 강당의 메인스피커로써 적합한 성능을 가지고 있습니다. 12인치 유닛이 가지는 특성으로 보이스 재생에 적합하며, 높은 출력을 재생할 수 있습니다. 인스톨과 휴대사용을 제공하도록 디자인되어 매우 유연하게 사용되며, 어려운 공간의 상황일지라도 용도에 맞는 적응력을 제공하도록 고안되었습니다. 중규모의 행사의 메인 스피커로써 사용이 가능하며 별도의 서브우퍼와 함께 사용시 더 높은 성능이 구현됩니다. 외부 EQ의 사용은 개별 요구에 맞게 소리 품질을 훼손하지 않으며 음색 균형을 맞추는 것을 쉽게 만듭니다.



Key Features

- True full range performance
- Rotatable 60 x 40 horn
- Full range for standalone use where space is constricted
- Use for ; Installations & AV applications requiring high SPL, wide and smooth coverage

Drawing

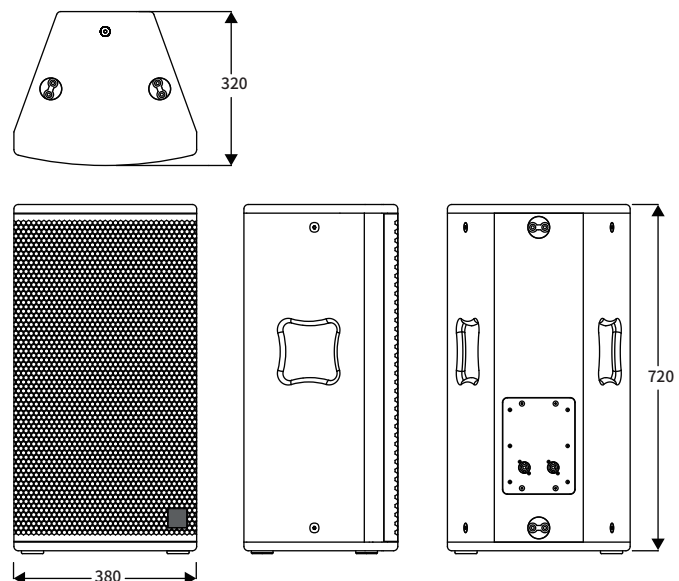


Specifications

Full Range Loudspeakers_Q Series

Q 12

Technical Specification	
Type	Full Range, Reflex Tuning
Impedance	8 Ohm, Minimum 5.7 ohm @ 286 Hz
Power (Program / Peak)	900 Watts / 1800 Watts
Sensitivity 2.83V / 1m	103 dB
Max SPL	129 dB (cont. max SPL / 1m), 135 dB peak
Frequency response -3dB	55 Hz - 20 kHz with active EQ
Dispersion	60° x 40°, Rotatable
Product Features	
Components	1 x 12" Low frequency driver / 1 x 1.5" horn loaded compression driver
Crossover	Passive, requires active EQ
Connectors	2 x 4 pole Speakon Connectors
Dimensions (W x H x D)	380 mm x 726 mm x 320 mm
Weight (Kg)	28
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	12 x mounting points, 6 to take flying eyes, 6 to take M8 bolt.
Additional Descriptive Data	
18 mm Birch Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with stainless steel Chris-system logo.	

Frequency Response

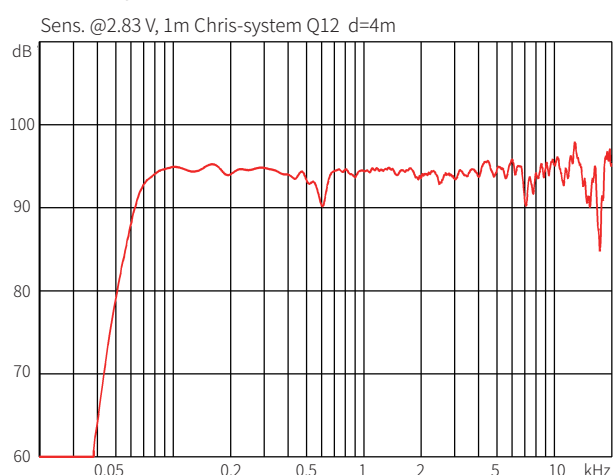

Impedance Response

