

Specifications

Full Range Loudspeakers_Q Series

Q 10

Information


Q10스피커는 흰백지와도 같은 스피커입니다. 표현하고자하는 소리의 재생을 치우침없이 잘 표현할 수 있습니다. 중소강의실의 메인스피커로 사용가능하며, 딜레이스피커 및 중대형 공간에서 센터 및 프론트필로도 사용이 가능합니다. 서브우퍼와 결합시 더 높은 성능을 자랑하며 하이 혼의 변경도 가능합니다. 모니터 스피커로도 사용이 가능하게 제작이 되었으며 고출력을 자랑합니다.



Key Features

- Matching voicing with the Q28 cabinets.
- Rotatable 90 x 40 horn
- High SPL in a compact cabinet
- Use for ; Small and medium installs and AV full range applications

Drawing

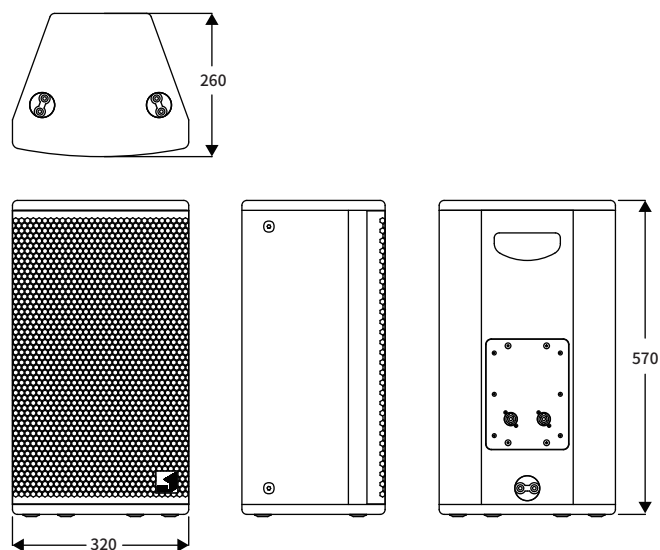


Specifications

Full Range Loudspeakers_Q Series

Q 10

Technical Specification	
Type	Full Range, Reflex Tuning
Impedance	8 Ohm, Minimum 5.38 ohm @ 377 Hz
Power (Program / Peak)	600 Watts / 1200 Watts
Sensitivity 2.83V / 1m	99 dB
Max SPL	123 dB (cont. max SPL / 1m), 129 dB peak
Frequency response -3dB	70 Hz - 19 kHz with active EQ
Dispersion	90° x 40°, Rotational
Product Features	
Components	1 x 10" Low frequency driver / 1 x 1" horn loaded compression driver
Crossover	Passive, requires active EQ
Connectors	2 x 4 pole Speakon Connectors, 2 x Binding Posts
Dimensions (W x H x D)	320 mm x 574 mm x 260 mm
Weight (Kg)	20
Colour	Black
Options	Available in white or Ral colours on request.
Rigging	10 x mounting points, 5 to take flying eyes, 5 to take M8 bolt.
Additional Descriptive Data	
18 mm Birch Ply construction, with durable scratch resistant black textured paint finish, kick-proof steel grill finished with stainless steel Chris-system logo.	

Frequency Response

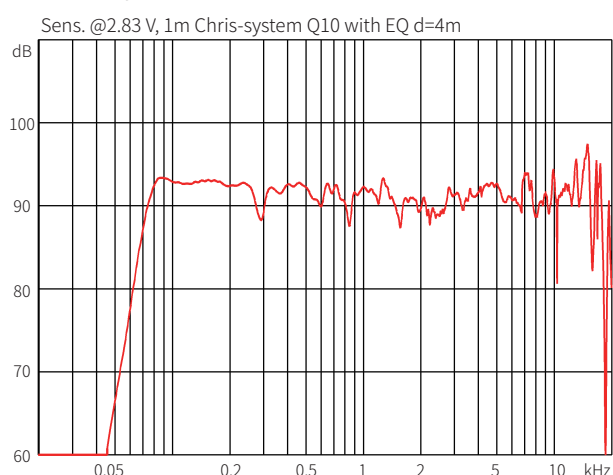

Impedance Response

